

IPv6 Address Design


A Few Practical Principles



North American IPv6 Summit 2013
19 April, 2013

How Big is the IPv6 Address Space?

- IPv4 developed 1973 – 1977
 - $2^{32} = 4.3$ billion addresses
 - More than anyone could possibly use!
- IPv6 developed mid-1990s
 - $2^{128} = 3.4 \times 10^{38}$ addresses
 - More than anyone could possibly use?

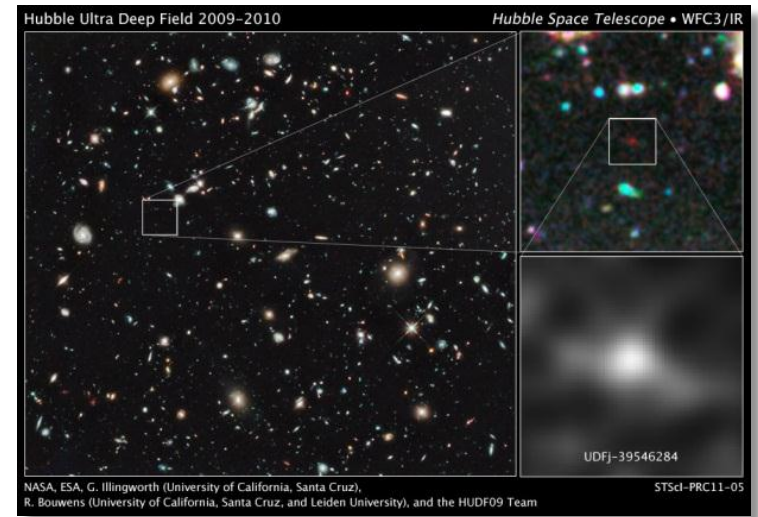

Galaxy UDFj-39546284

How Big is the IPv6 Address Space?


- IPv4 developed 1973 – 1977
 - $2^{32} = 4.3$ billion addresses
 - More than anyone could possibly use!
- IPv6 developed mid-1990s
 - $2^{128} = 3.4 \times 10^{38}$ addresses

Some Perspective:

1 picometer = 10^{-12} (one trillionth) meter

2^{32} picometers = 4.29 millimeters
- length of a small ant

2^{128} picometers = 3.4×10^{23} kilometers
- 34 billion light years
- Furthest visible object in universe: 13.2B LYs

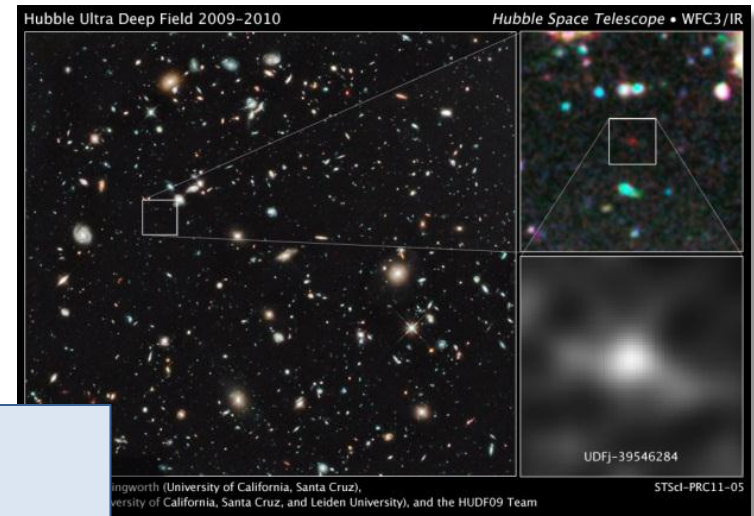

Galaxy UDFj-39546284


Abandon IPv4 Thinking!

- Foremost IPv4 address design consideration: **Address Conservation**
- Balancing act between:
 - Number of subnets
 - Number of hosts on *each* subnet
- Result: VLSM
 - Complex
 - Hard to manage
- Legacy “class” categories still sometimes used in IPv4
 - Outdated and misleading
- No such thing as subnet masks in IPv6
 - CIDR-style prefix length notation always used




2001:db8:1234:abcd:5401:3c:15:85/48

IPv6 Global Unicast Address Structure

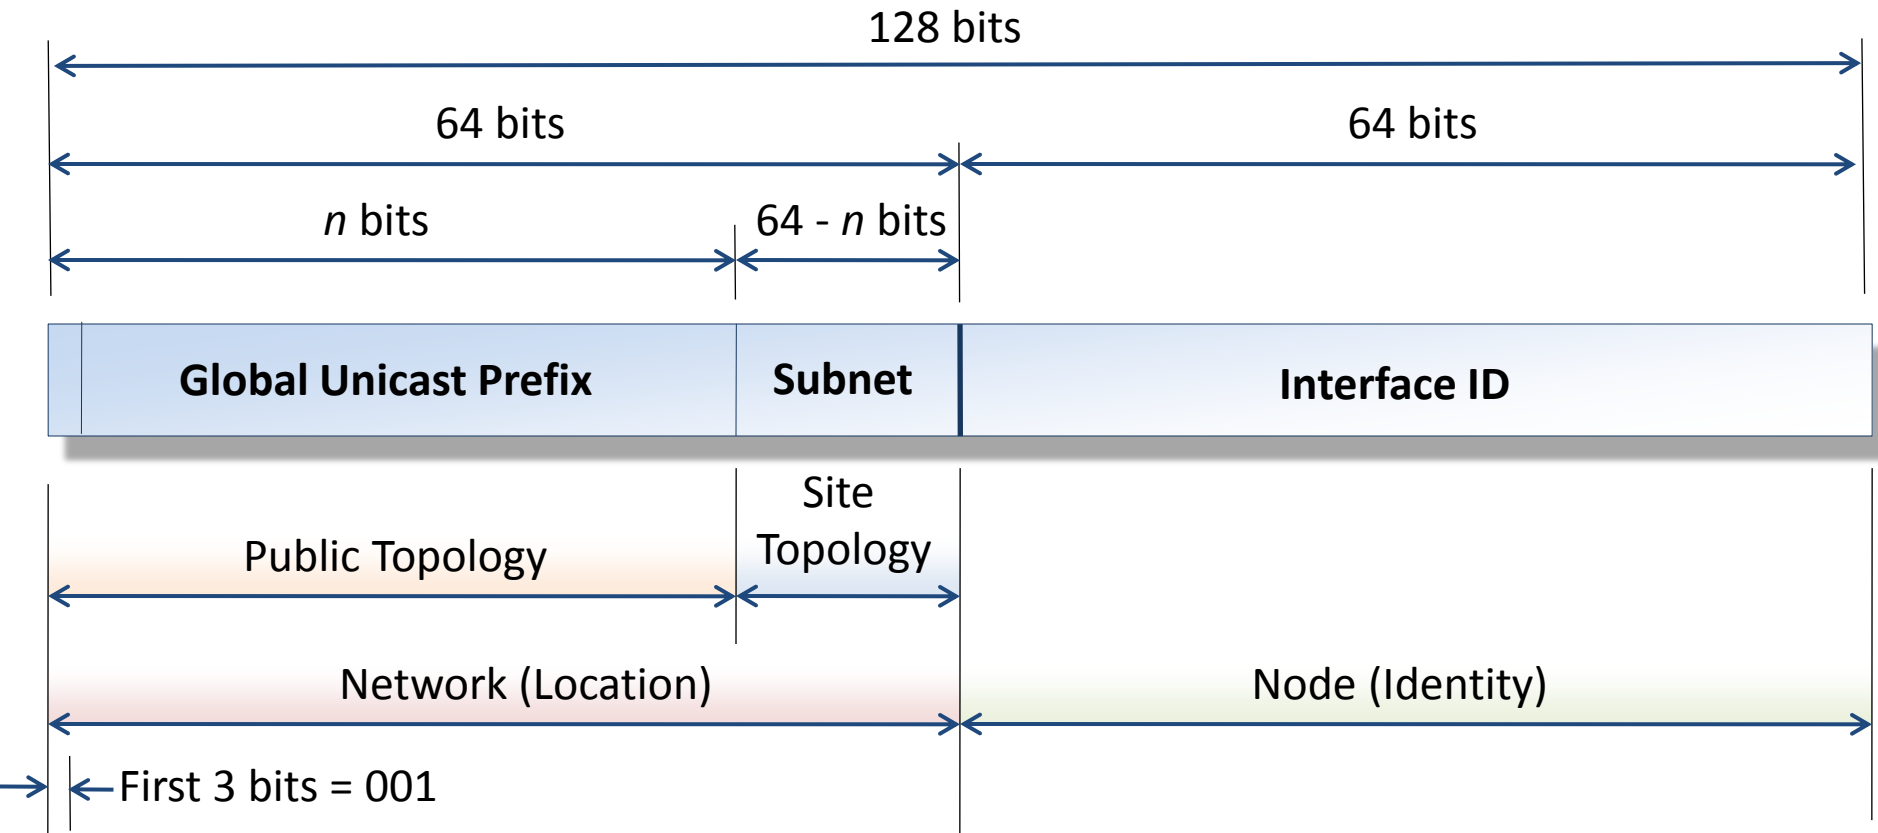


Global IPv6 Unicast Prefix Allocations

Total IPv6 Space

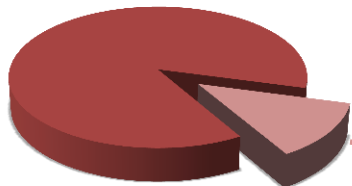


Reserved for Global Unicast:
2000/3

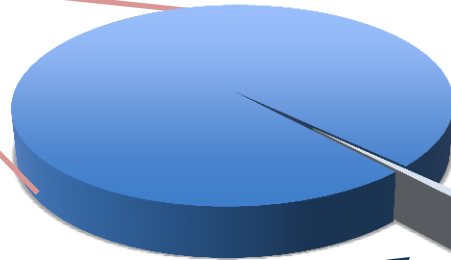

5 /12s assigned to RIRs*

RIR	IPv6 Prefix
AfriNIC	2C00::/12
APNIC	2400::/12
ARIN	2600::/12
LACNIC	2800::/12
RIPE NCC	2A00::/12

*Plus numerous /23s and shorter

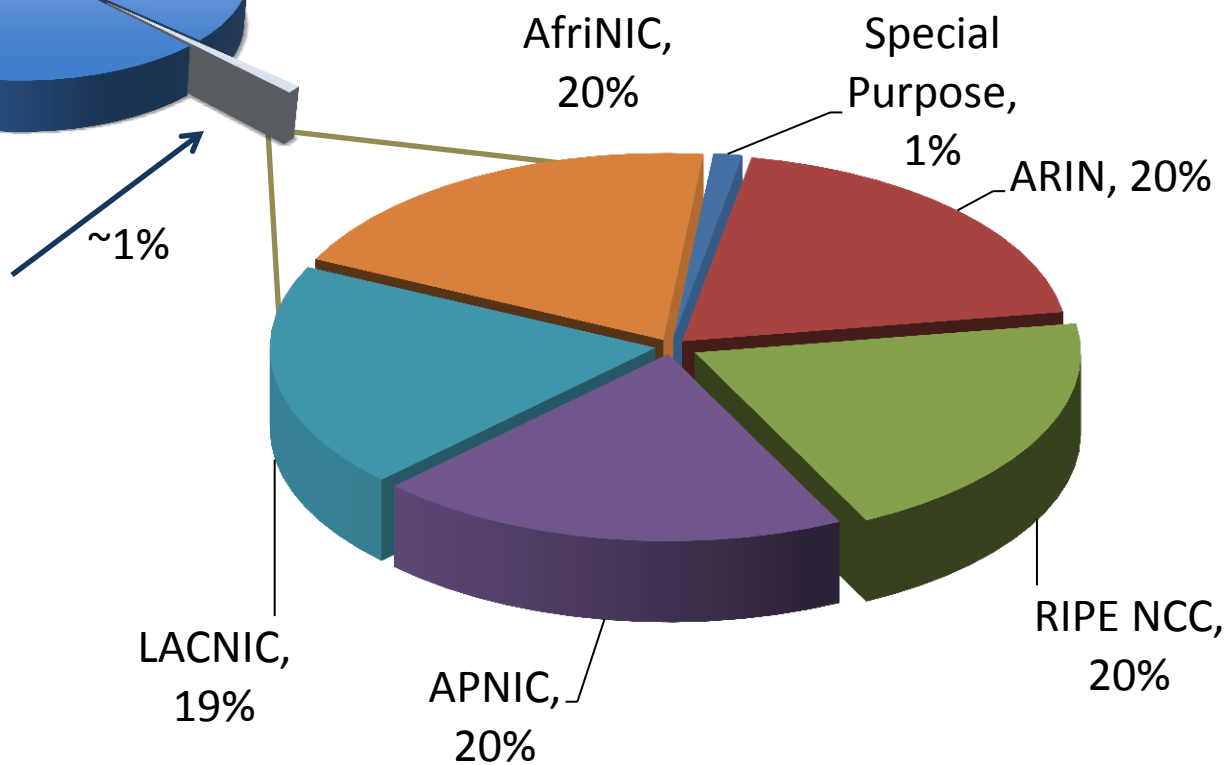

Source:

<http://www.iana.org/assignments/ipv6-unicast-address-assignments/ipv6-unicast-address-assignments.xml>

Copyright © 2013 Jeff Doyle and Associates, Inc.

In Practical Terms...

➤ Typical IPv6 prefix assignments:

- Service provider (LIR): /32 → 2^{32} /64 subnets
- Large end user: /48 → 65,536 /64 subnets
- Medium end user: /56 → 256 /64 subnets
- Small/ Home/ SOHO: /64 or /60 → 1 or 16 /64 subnets

➤ Address

- Is th
- Yes!

➤ If you right p

ation

Is this really practical?

ave the

What Prefix Size is Right for You?

- How do you define large, medium, and small?
 - Are these arbitrary boundaries?
- Why not assign /48 *per site*?
 - Site = one building
 - 30 buildings per campus = 30 /48s
 - And yes, a home (apartment or house) is a site!
 - It's not about waste, it's about consistency
- /48 for all allocations was original policy (RFC 3177)
 - *“Home network subscribers, connecting though on-demand or always-on connections should receive a /48.”*
- Obsoleted by RFC 6177
 - Concerns about waste
 - Intention is that IPv6 should last for 100 years
- **ARIN supports a liberal allocation policy**

What Prefix Size is Right for You?

ARIN Number Resource Policy Manual:

2.10. End Site

“The term End Site shall mean a single structure or service delivery address, or, in the case of a multi-tenant structure, a single tenant within said structure (a single customer location).”


6.5.8.2.1. Standard Sites

“An organization may request up to a /48 for each site in its network, and any sites that will be operational within 12 months.”

➤ **ARIN supports a liberal allocation policy**

Are You Ready for IPv7?

- All current global unicast IPv6 prefixes start with 001
 - This is 1/8 of the entire IPv6 space
 - $2^{45} = 35$ trillion /48 prefixes
- UN projections for world population in 2100:
 - Median figure: 10 billion
 - High end: 16 billion
- $2^{45} / 16$ billion = 2199 /48s *per person*
 - And, we still have 85% of the IPv6 space held in reserve
- **Opinion: IP will become obsolete before IPv6 is depleted**

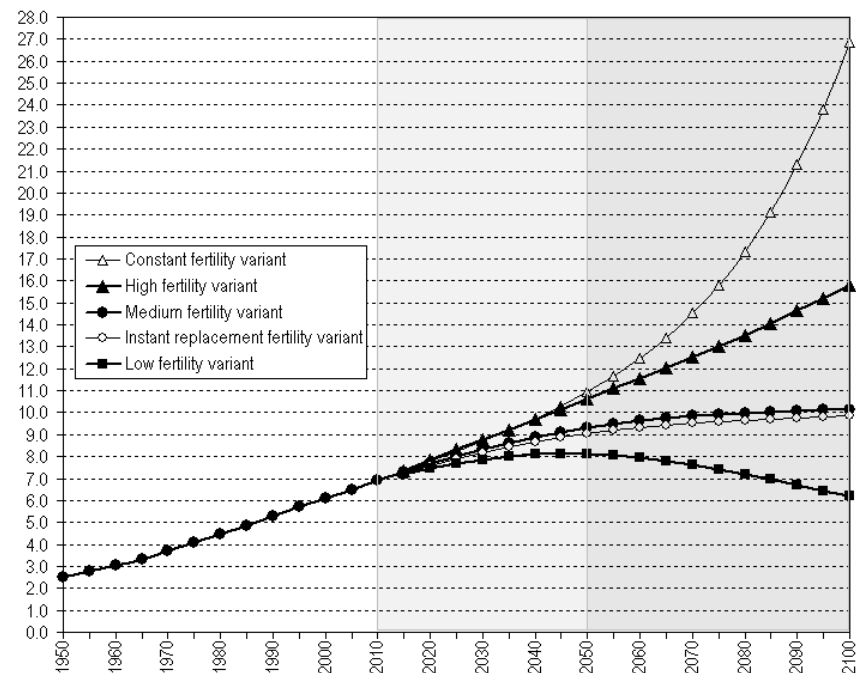

Subnet Assignments

- RFC 4291 specifies that Interface-ID is 64 bits
 - Several IPv6 functions depend on this
- All subnets should be /64
 - Simplifies address management
 - Random addressing improves security
- Trend is to use stateful address assignments (DHCPv6)

What About Point-to-Point Links?

- 18 million trillion addresses in a /64 link
 - And I will only *ever* use 2 of them?
 - **Are you kidding???**
- People have a very hard time accepting this
 - Again: This is not IPv4!
 - What else are you going to do with those addresses?
- It's a matter of comprehending the scale
 - **5000 out of 2^{64} is not really any bigger than 2 out of 2^{64}**

Point-to-Point Subnets (Battling RFCs)

➤ Reasons for using /64

- RFC 3627
- RFC 5375 => /64 usage endorsed and encouraged
- Design consistency
- Anycast problems are not significant on PtP links
 - Subnet-Router Anycast
 - MIPv6 Home Agent Anycast

➤ Reasons for using /127

- RFC 6164
- Ping-pong vulnerability
 - This is an issue with older version of ICMPv6 (RFC 2463)
 - Issue is corrected in newer version of ICMPv6 (RFC 4443)
 - Vendors: Upgrade your code!
- Neighbor cache exhaustion vulnerability



Point-to-Point Subnets (cont.)

- **Insist** that your vendors use current ICMPv6!
- Don't use /126
 - This is IPv4 thinking
 - “Subnet number” is meaningless in IPv6
 - IPv6 does not use broadcast addresses
- **Potential compromise:**
 - Assign /64 per PtP subnet
 - Address /127 out of the /64

What Do I Get in Exchange for Waste?

➤ Simplicity

- One-size-fits-all subnets

➤ Manageability

- Hex is much easier to interpret at binary level than decimal

➤ Scalability

- Room to grow

➤ Flexibility

- Room to change



Designing for Simplicity

- Start by mapping “working” bits
 - Generally the bits between assigned prefix and Interface-ID
- Group by hex digit (nibble)
 - 4 bits per hex digit
- Define “meanings” you need to operate
 - Geographic area? Logical topology? Type designation? User ID?
- Try to keep “meanings” on hex boundaries
 - Defined meanings will then be some multiple of 2^{4n}
 - Ex: 16, 256, 4096, 65536...
- Don't get carried away with meanings
 - No need for 10 layers of address hierarchy if 4 will do

Designing for Simplicity (continued)

- Use zero space as much as possible
 - Which address is easier to read?
 - 2001:DB8:2405:83FC:72A6:3452:19ED:4727
 - 2001:DB8:2405:C::27
- Benefit: Operations quickly learns to focus on meaningful bits
 - Ignore public prefix (usually)
 - Ignore Interface-ID (usually)
 - A few hex digits tell operations most of what they need to know



2001:DB8:2405:C::27

Region Office Subnet

↑ ↑ ↑

Designing for Scale

- Leave “zero” space whenever possible
 - Designate as Reserved
- Insert between “meaningful” digits or bits
 - Allows future expansion in two directions

Designing for the Future

- Trying to anticipate the unanticipated
 - A challenge for any kind of design
- Another reason for well-placed Reserved (zero) space
 - Horizontal Reserved space
 - Vertical Reserved space
- Do not integrate IPv4 into an IPv6 design!
 - Reading IPv4 in hex is (almost) meaningless
 - IPv4 will (eventually) go away



Other Issues

- DNS design and management is critical
 - DNS issues are well documented
- IP Address Management is critical
 - IPv6 design is not easy to manage via spreadsheets
 - Good luck finding integrated DNS and DHCPv6 management
- **Abandon IPv4 thinking!**

Questions?

jdoyle@doyleassociates.net

www.doyleassociates.net

+1-303-428-4680

